


# ADVANCED TRAINING UNIT FOR FAULT LOCATION - 25 FAULTS

811

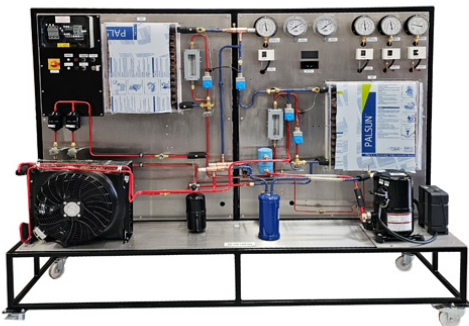

Year 1  
study

## Features

- Demonstrates multi-evaporator system operating at different temperatures
- Incorporates 25 typical system faults, each activated by a push-button switch.
- Allows practical fault detection and location.
- Introduces students to 3 phase systems.

## Description

The Advanced Training Unit for Fault Location 811 is a fully operational refrigeration unit with two visible evaporators simulating freezing and cooling rooms, operating from a single semi-hermetic condensing unit. The unit is constructed entirely from standard commercial components, including all of the necessary primary and safety controls and will give students valuable experience of system adjustment and fault finding on a multi-evaporator three phase refrigeration system. On the model 811 all standard components are visible, mounted on a steel frame with stainless steel panels. Instrumentation includes condensing, evaporating and suction pressures, mechanical and digital temperature measurement, digital multi-meter and refrigerant flow meters. The system includes reverse gas defrost, suction accumulator, oil separation and variable speed evaporator and condenser fans. Instructor controlled faults are induced by internal components which are hidden from student view. A standard Student Tool Kit, and Test and Service Equipment Package are available as optional items.

## Related Laws/Applications

- Refrigerant circuit and electrical circuit faults

### Learning capabilities

- Compressor valve fault
- Oil separator fault
- Overcharge
- Undercharge
- Check valve leak
- Evaporator pressure controller fault
- Thermostatic expansion valve not operating – freezer evaporator
- Thermostatic expansion valve fault – freezer evaporator
- Thermostatic expansion valve not operating – cold room evaporator
- Thermostatic expansion valve fault – cold room evaporator
- Suction line freezer evaporator – frosted
- Suction line cooler evaporator – frosted
- Filter dryer restriction
- Discharge pressure fault
- Hot gas defrosting fault
- Suction pressure too low - decreasing evaporator capacity
- Suctions pressure too high
- One phase fault
- Two phase fault
- One contact set (motor overload protection) disconnected
- Two contact sets (motor overload protection) disconnected
- Thermal overload protection of motor switch box
- Coil fault – motor protection – starter box
- Thermostatic fault – freezing room – not working
- Thermostat fault – cooling room – not working

### Technical Specification

- Compressor: Semi-Hermetic, 0.37 kW. 1450 rpm
- Condenser: Air-cooled, aluminium finned, copper coil
- Evaporators: Display-case evaporators. Aluminium finned, copper coils with hot gas defrosting
- Injection controls: 2 thermostatic expansion valves
- Liquid receiver
- Control equipment:
  - - Low and high-pressure control
  - - Thermostatic control
  - - Evaporator pressure control
  - - Capacity control
  - - Condensing pressure control and crankcase pressure control
  - - Low pressure switch
  - - High pressure switch
- Measuring equipment: Digital temperature indicator with 10 ways selector switch
- 4 pressure gauges (3 compound, 1 high pressure)
- 2 dial thermometers.
- Hand-held digital multi-meter
- 25 switches located on the side panel under a hinged cover allow combinations of faults to be activated by the instructor.
- An electrical control box is mounted on the panel and includes accessible three phase relays, fuses and an overload protector. An internal three phase residual current device protects against earth leakage. Fan speed controls and defrost switch with indicator are also panel mounted.

### Recommended Ancillaries

- TKB
- TSE

### What's in the Box?

- 1 x 811
- 1 x Multimeter + leads
- 1 x Comparator
- 1 x Voltstick
- Instruction manual
- Packing list
- Test sheet

### Weights & Dimensions

- Weight: 425 kg
- Length: 2160mm
- Width: 700mm
- Height: 1700mm

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure.

Copyright © 2018 P.A. Hilton Limited. All rights reserved. This technical leaflet, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of P. A. Hilton Limited. Hi-Tech Education is a registered trade mark of P. A. Hilton Limited.

COUNTRY OF ORIGIN - UK WARRANTY PERIOD - 5 YEARS

**Essential Services**

- 7 Amp, 380-440 Volts, Three Phase, 50Hz (With earth/ground).
- 13Amp, 210-220 Volts, Three Phase, 60Hz (With earth/ground).

**Ordering information**

To order this product, please call PA Hilton quoting the following codes:

811/415

811/220

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure.

Copyright © 2018 P.A. Hilton Limited. All rights reserved. This technical leaflet, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of P. A. Hilton Limited. Hi-Tech Education is a registered trade mark of P. A. Hilton Limited.

COUNTRY OF ORIGIN - UK WARRANTY PERIOD - 5 YEARS